

High performance LED floodlight to replace conventional mercury / incandescent lamp

- Four lineups 1500, 3000, 4000 and 6000 models are available
- Incorporated with low heat and high efficiency LED from Japan
- Input voltage of AC100 ~ 240V
- Wide light distribution and uniform brightness
- Aluminum housing, tempered UV resistant glass and built-in power supply


Built-in Power Supply

Constant Voltage DC 12V (Optional)

LED Life Span 40,000 hrs

Outdoor Type (IP65)

### ▶ Example of Luminous Flux Level Simulation

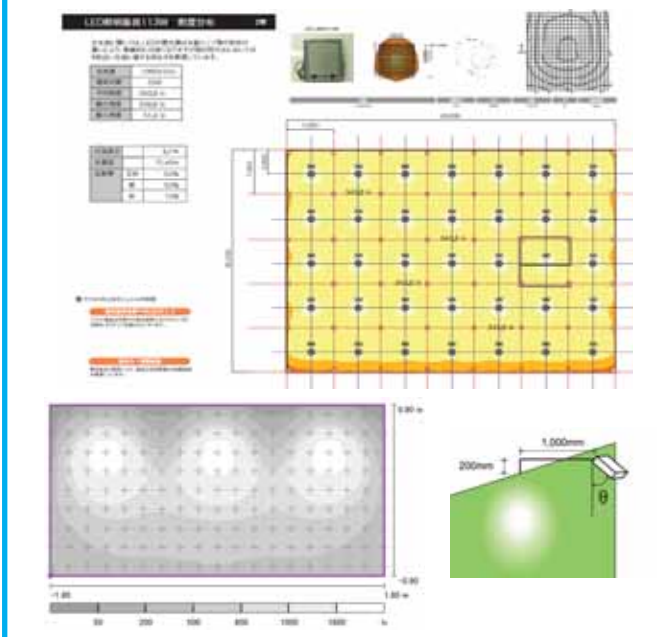

	Profile / Dimension	Model Name	Power Consumption	Lumen Output	Weight (Kg)	IP
1500 Type		FB1814-50NZWVZ A	19.5W	810 lm	1.12	IP65
3000 Type		FB2319-50NZWVU A	38.2W	1,590 lm	2.39	
4000 Type		FS3715-50N6BCZ B	50.9W	2,860 lm	4.6	
6000 Type		FS5115-50N6BCZ B	74.0W	3,600 lm	7.2	

Note : 60 degree reflector use