



**Seamless LED tube lights suitable for replacing fluorescent light**

- Suitable for architectural lightings such as cove and shelf lighting
- 4 different lengths are available: 1 feet, 2 feet, 3 feet and 4 feet
- Both indoor and outdoor (IP65) types are available
- Achieve high CRI (typical 85)
- Robust aluminum housing with polycarbonate diffuser cover

**Profile / Dimension**



L: 301mm / 580mm / 859mm / 1138mm

Constant Voltage DC12V	Power Supply Unit Separated	Beam Angle 120°	Indoor and Outdoor Type
LED Life Span 50,000 hrs	Dimmable	Water-Proof Connector (Optional)	Ra 85 Typical




**Cove Lighting**



- Wide and soft lighting effect due to frosted diffuser cover
- Seamless connection possible (Wire is allocated at side way)
- No UV and minimum heat emission
- Cost significantly reduced by using NICHIA Japan's latest LED diodes
- Angle-adjustable bracket or special metal mounting bracket (optional)

- Angle-adjustable mounting bracket (Screw-in type, Optional)

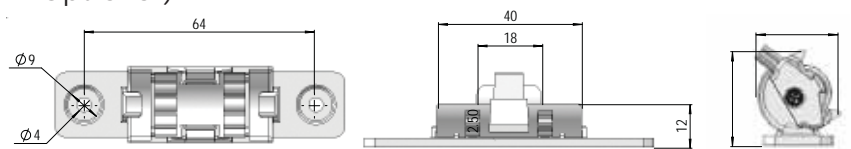

Fitting to be inserted into bracket

**Shelf / Display Lighting**



- DC12V Switching Power supply unit  
Heavy duty type  
(15W / 30W / 50W / 80W / 100W / up to 150W)  
TDK Lambda brand (High conversion efficiency, c/w surge-protection circuit)



Model	LED Color	Length (mm)	Nos of LED	Power Consumption (W)	Weight (g)	LED Luminous Intensity (Lumens)
ASB(S)-03SL4-15D	Neutral White (4,000K)	301	15	4.8	53g S (56g)	360
ASB(S)-03SL2-15D	Warm White (2,700K)					345
ASB(S)-06SL4-30D	Neutral White (4,000K)	580	30	9.6	100g S (107g)	720
ASB(S)-06SL2-30D	Warm White (2,700K)					690
ASB(S)-09SL4-45D	Neutral White (4,000K)	859	45	14.4	147g S (157g)	1080
ASB(S)-09SL2-45D	Warm White (2,700K)					1035
ASB(S)-12SL4-60D	Neutral White (4,000K)	1,138	60	19.2	194g S (207g)	1440
ASB(S)-12SL2-60D	Warm White (2,700K)					1380

\* (S) waterproof version

Please consult Aristo sales staff for other LED color temperature.